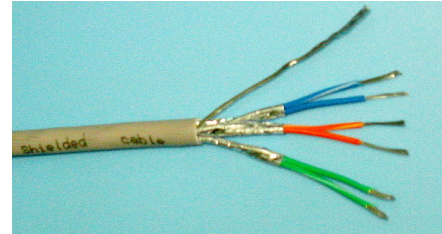


22 Gage

Stranded Conductors (7/AWG30)

Polyethylene Insulated, Paired, Individually Shielded
Part Number : 8777-ZH

Product Description:

Tinned copper conductors, polyethylene insulated, twisted pairs

Each pair individually shielded with aluminum-polyester foil

24 AWG stranded tinned copper drain wire

Low Smoke and Halogen free material (DW8523) outer jacket

IEC 60332-1, IEC 60332-3-24, IEC 61034-2, IEC 60754-1, IEC 60754-2

| | | |
|---|---|-------------|
| No. of Pairs | : | 3 |
| Standard Length | : | 1000ft/305m |
| Nominal O.D. | : | 5.8mm |
| Nominal Impedance | : | 50 ohm |
| Nom Velocity of Prop. | : | 66% |
| Nominal D.C.R. | | |
| Conductor | : | 49.8 ohm/km |
| Shield | : | 36.2 ohm/km |
| Nominal Capacitance | : | 105 pF/m |
| <i>(between conductors)</i> | | |
| Nominal Capacitance | : | 195 pF/m |
| <i>(between one conductor and other conductors connected to Shield)</i> | | |