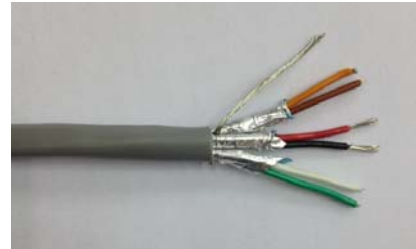


22 Gage

Stranded Conductors (7/AWG30)

Polyethylene Insulated, Paired, Individually Shielded
Part Number : 8777

Product Description:

Tinned copper conductors, polyethylene insulated, twisted pairs

Each pair individually shielded with aluminum-polyester foil

24 AWG stranded tinned copper drain wire

PVC jacket (Color: Grey)

No. of Pairs	: 3
Standard Length	: 1000ft/305m
Nominal O.D.	: 5.8mm
Nominal Impedance	: 50 ohm
Nom Velocity of Prop.	: 66%
Nominal D.C.R.	
Conductor	: 49.8 ohm/km
Shield	: 36.2 ohm/km
Nominal Capacitance	: 105 pF/m
<i>(between conductors)</i>	
Nominal Capacitance	: 195 pF/m
<i>(between one conductor and other conductors connected to Shield)</i>	