


Fire Resistance & LSOH Audio/Control Cable

Stranded Conductors (21/0.21mm)

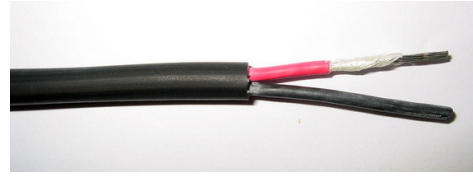

Part Number : **C6366FR-ZH**

Applications :

For fixed installation typically in sound systems, intercom systems, audio systems where circuit integrity must be maintained.

Construction :

Twisted pair tinned copper conductors with spiral wrapped mica tape fire barrier, LSOH compound (DW8523) insulated and sheathed.

Standards :

IEC 60331, IEC 60332-1, IEC 60332-3-24, IEC 61034-2, IEC 60754-1, IEC 60754-2
BS6387 categories C, W & Z

No. of Conductors	:	2 x 0.75mm ²
Conductor Stranding	:	21 x 0.21mm
Insulation Thickness	:	0.55mm
Nominal O.D.	:	7.80mm ±0.2
Operating Temperature Range	:	-25°C to +90°C
Nom. Conductor DC Resistance	:	28Ω/km at 20°C
Insulation Resistance	:	≥ 50MΩ/km at 20°C
Max. Operating Voltage	:	600V rms

Voltage Test : Core to core : 1000Va.c./1min.